

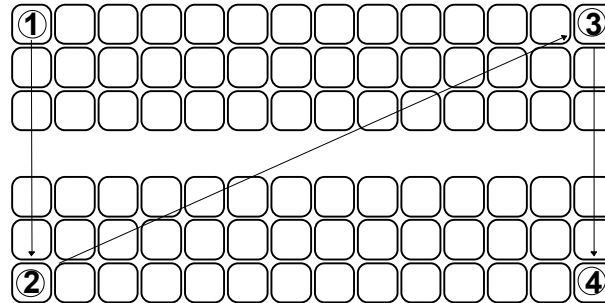
SPS-3xx / ER-9xx Series

Memory All Clear How to...



1. Memory Clear

1. Turn the control lock to the SM position one position clockwise from the PGM position.
2. Press and hold the key position where the **A** key is located on the default keyboard layout.
3. While continuing to hold the **A** key while turning the power switch to the ON position.
The message: "RAM ALL CLEAR ." displays on the screen.
4. Press the upper left key of the keyboard, then the lower left key, then the upper right key, and finally press the lower right key.





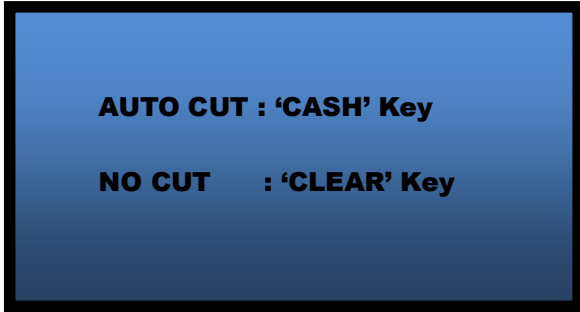

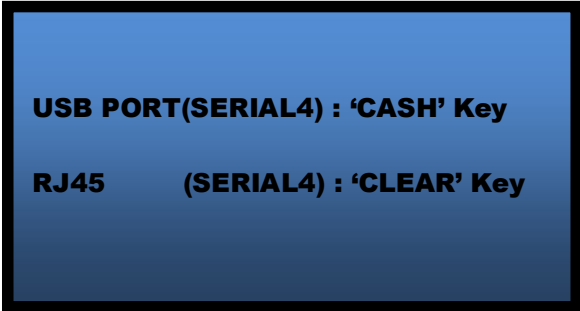

5. The display will monitor the memory clear process, which takes about 1 minute. When complete, the version and check sum will display.

4	5	6	A
1	2	3	
0	00	.	

TO MEMORY ALL CLEAR:

Press and hold this key position during power-up in SERVICE mode.

2. Select Peripheral Option

SPS-3xx Screen	ER-9xx Screen	DESCRIPTION
		You can select kind of printer type 1-STATION or 2-STATION by 'CASH' or 'CLEAR' key
		You can select to use this option or not.
		<p>You can select serial4 type USB or RJ45.</p> <p>If have no interface option board on the SET, press the 'CASH' key.</p>